

LIDA[®] TSA[™] Anodes

LIDA[®] TSA[™] Anodes - a mixed metal oxide (MMO) on titanium anode material configured

A tension string anode structure:

- Multiple LIDA[®] anodes and cable are assembled on a supporting rope.
- Spacers insure the anode is in complete contact with seawater.
- The LIDA TSA[™] is connected from the platform to a dead weight on the sea floor.


Performance advantages

- Fewer anodes required with higher current density
- Current output is easily adjusted
- Ease of installation reduces cost of cathodic protection system
- Greater savings in deep water installations
- A twenty year history of successful cathodic protection in platforms from 15 to 120 meters in depth


Case Study:

Loango Field Platforms operated by Agip Recherches Congo retrofit a LIDA TSA[™] system over a poor performing galvanic system.

The LIDA TSA[™] operated successfully from 1987 to 2005 when it was replaced with a new system to coincide with the 20 year extension in the platforms planned operating life.

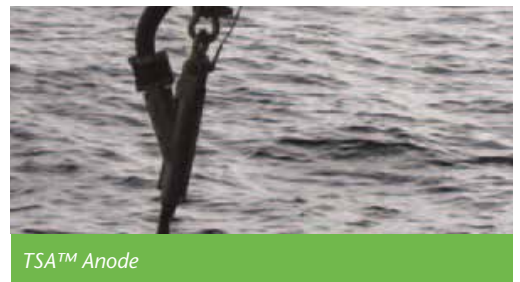

Tensioned Anode String Installed on a Steel Jacket

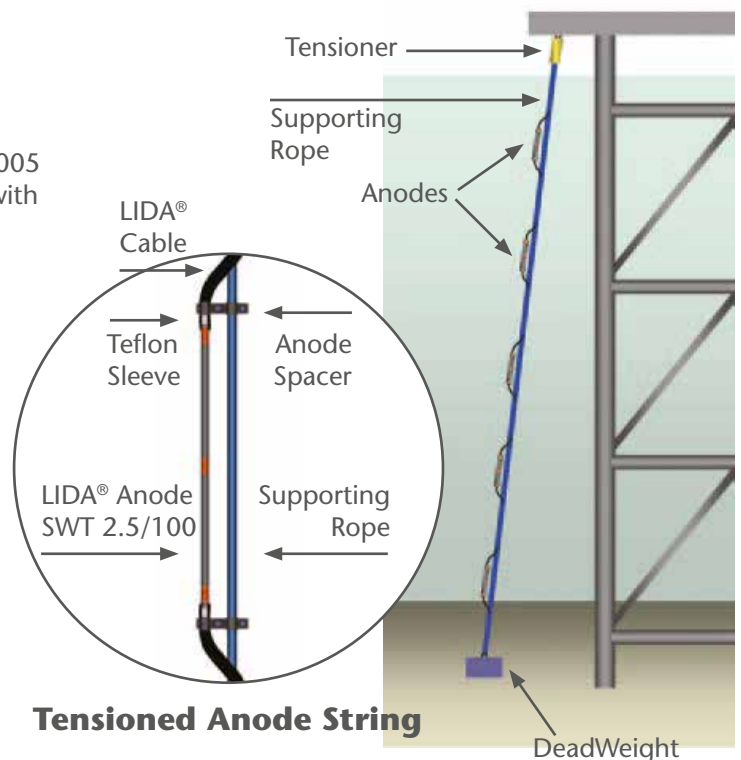

ELECTROCHEMISTRY AT YOUR SERVICE[™]

SPECIALTIES & NEW APPLICATIONS

© Copyright 2017 Industrie De Nora S.p.A. - All rights reserved.

De Nora, ON circle, our research - your future, electrochemistry at your service, Stargard[®] (and any other trademark name) are trademarks or registered trademarks of Industrie De Nora S.p.A. or other companies of the group in Europe and/or other countries. Other trademarks used here in are the registered trademarks of their respective owners.

The information contained herein is offered for use by technically qualified personnel at their discretion and risk without warranty of any kind.